


**OIL/WATER SEPARATOR: HORIZONTAL,  
WITH A SLUDGE COMPARTMENT, A LAMELLA  
FILTER AND AUTOMATIC CLOSING (TYPE: SR)**

**Material:**  
PEHD

**Colour(s):**

**Documents:**

Statement of approval of the product for use, as a custom-made product, in a civil structure

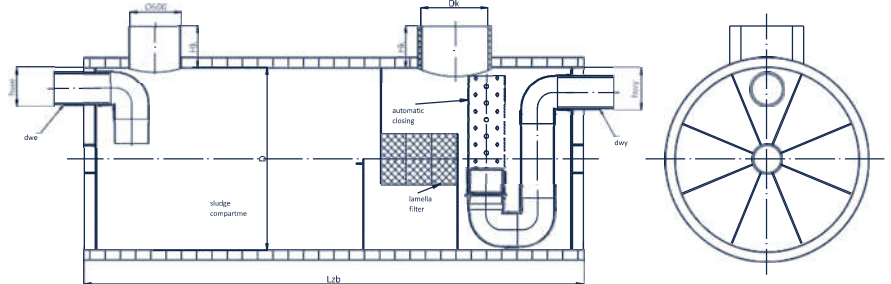

**SEPARATOR (TYPE: SR) BACKFILL: 1.5 M**

CODE	TYPE	Q [l/s]	D [mm]	Lzb [m]	dwe/dwy [mm]	hwe [mm]	hwy [mm]	Dk1/Dk2 [mm]	Hk [m]	chimney [pcs.]
054 2 15	SR 2	2	1000	1.5	110	160	210	— /800	1.5	1
054 3 15	SR 3	3	1000	2.0	160	210	260	— /800	1.5	1
054 6 15	SR 6	6	1200	2.0	160	210	260	— /800	1.5	1
054 8 15	SR 8	8	1400	2.0	160	210	260	— /800	1.5	2
054 10 15	SR 10	10	1400	2.5	200	250	300	600/800	1.5	2
054 12 15	SR 12	12	1400	2.8	200	250	300	600/800	1.5	2
054 15 15	SR 15	15	1400	3.0	200	250	300	600/800	1.5	2
054 20 15	SR 20	20	1400	3.6	200	250	300	600/800	1.5	2
054 25 15	SR 25	25	1400	4.0	200	250	300	600/800	1.5	2
054 30 15	SR 30	30	1400	5.0	200	250	300	600/800	1.5	2
054 35 15	SR 35	35	1600	4.5	315	365	415	600/800	1.5	2
054 40 15	SR 40	40	1600	5.0	315	365	415	600/800	1.5	2
054 45 15	SR 45	45	1800	4.5	315	365	415	600/800	1.5	2
054 50 15	SR 50	50	1800	5.0	315	365	415	600/800	1.5	2
054 60 15	SR 60	60	1800	5.5	315	365	415	600/800	1.5	2
054 65 15	SR 65	65	1800	6.0	315	365	415	600/800	1.5	2
054 70 15	SR 70	70	2000	5.5	315	365	415	600/800	1.5	2
054 80 15	SR 80	80	2000	6.0	315	365	415	600/800	1.5	2
054 90 15	SR 90	90	2200	6.0	400	450	500	600/800	1.5	2
054 100 15	SR 100	100	2200	6.8	400	450	500	600/800	1.5	2
054 120 15	SR 120	120	2200	7.5	400	450	500	600/800	1.5	2
054 130 15	SR 130	130	2400	7.0	400	450	500	600/800	1.5	2
054 140 15	SR 140	140	2400	7.5	400	450	500	600/800	1.5	2
054 150 15	SR 150	150	2400	8.0	400	450	500	600/800	1.5	2
054 160 15	SR 160	160	2400	8.5	400	450	500	600/800	1.5	2
054 170 15	SR 170	170	2400	9.0	400	450	500	600/800	1.5	2
054 180 15	SR 180	180	2400	9.5	400	450	500	600/800	1.5	2
054 200 15	SR 200	200	2400	10.5	400	450	500	600/800	1.5	2

The above table contains standard sizes