


OIL/WATER SEPARATOR: LEVELS, WITH A SLUDGE COMPARTMENT, WITH A LAMELLA FILTER AND AUTOMATIC CLOSING (TYPE: SR)

Material:
PEHD

Colour(s):
Black

Documents:

Statement of approval of the product for use, as a custom-made product, in a civil structure

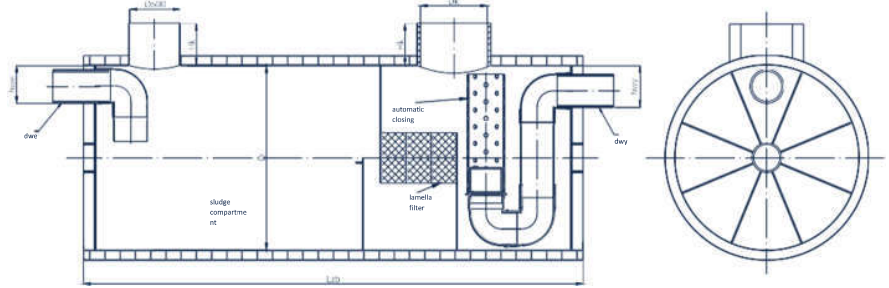

SEPARATOR (TYPE: SR) BACKFILL: 1.0 M

CODE	TYPE	Q [l/s]	D [mm]	Lzb [m]	dwe/dwy [mm]	hwe [mm]	hwy [mm]	Dk1/Dk2 [mm]	Hk [m]	chimney [pcs.]
054 2 10	SR 2	2	1000	1.5	110	160	210	— /800	1.0	1
054 3 10	SR 3	3	1000	2.0	160	210	260	— /800	1.0	1
054 6 10	SR 6	6	1200	2.0	160	210	260	— /800	1.0	1
054 8 10	SR 8	8	1400	2.0	160	210	260	— /800	1.0	2
054 10 10	SR 10	10	1400	2.5	200	250	300	600/800	1.0	2
054 12 10	SR 12	12	1400	2.8	200	250	300	600/800	1.0	2
054 15 10	SR 15	15	1400	3.0	200	250	300	600/800	1.0	2
054 20 10	SR 20	20	1400	3.6	200	250	300	600/800	1.0	2
054 25 10	SR 25	25	1400	4.0	200	250	300	600/800	1.0	2
054 30 10	SR 30	30	1400	5.0	200	250	300	600/800	1.0	2
054 35 10	SR 35	35	1600	4.5	315	365	415	600/800	1.0	2
054 40 10	SR 40	40	1600	5.0	315	365	415	600/800	1.0	2
054 45 10	SR 45	45	1800	4.5	315	365	415	600/800	1.0	2
054 50 10	SR 50	50	1800	5.0	315	365	415	600/800	1.0	2
054 60 10	SR 60	60	1800	5.5	315	365	415	600/800	1.0	2
054 65 10	SR 65	65	1800	6.0	315	365	415	600/800	1.0	2
054 70 10	SR 70	70	2000	5.5	315	365	415	600/800	1.0	2
054 80 10	SR 80	80	2000	6.0	315	365	415	600/800	1.0	2
054 90 10	SR 90	90	2200	6.0	400	450	500	600/800	1.0	2
054 100 10	SR 100	100	2200	6.8	400	450	500	600/800	1.0	2
054 120 10	SR 120	120	2200	7.5	400	450	500	600/800	1.0	2
054 130 10	SR 130	130	2400	7.0	400	450	500	600/800	1.0	2
054 140 10	SR 140	140	2400	7.5	400	450	500	600/800	1.0	2
054 100 10	SR 150	150	2400	8.0	400	450	500	600/800	1.0	2
054 160 10	SR 160	160	2400	8.5	400	450	500	600/800	1.0	2
054 170 10	SR 170	170	2400	9.0	400	450	500	600/800	1.0	2
054 180 10	SR 180	180	2400	9.5	400	450	500	600/800	1.0	2
054 200 10	SR 200	200	2400	10.5	400	450	500	600/800	1.0	2

The above table contains standard sizes